

Degassing Units

We have redesigned our AG and BG Series units for truly trouble-less operation.
Consult our “Degassing Performance Comparison Chart” below to find the right unit for your application.



Gastorr AG-42

Gastorr AG-44

Product Name	Gastorr Solvent Degassing Units	
Product Number	AG-42-01	AG-44-01
Channels	2	4
Internal volume	340 μ L	
Flow rate	≤ 10 mL/min	
Vacuum range	100 hPa fixed	
Thread size	1/4-28 UNF	
Wetted material	Teflon TM AF* ¹ , ETFE, PTFE	
Remote control	—	
Dimensions	108 (H) $\times$ 70 (W) $\times$ 240 (D) mm, excluding protuberances	
Weight	Approx. 2.1 kg	
Power	AC 100 - 240 V (50 / 60 Hz) MAX 80 VA	
Order code	SGA-G3001	SGA-G3002

*1: Teflon TM AF is a registered trademark of the Chemours Corporation.
Note: cannot be used with fluorinated solvents.


NEW

Solvent Degassing System Gastorr AG Series

A trouble-less degassing series

Features

- ☐ Low-cost alternative for low flow applications
- ☐ Auto cleaning function prevents vacuum pump deterioration
- ☐ CPU control achieves stable degassing
- ☐ Independent chamber design prevents solvent contamination
- ☐ Choose from 2 channel or 4 channel configurations

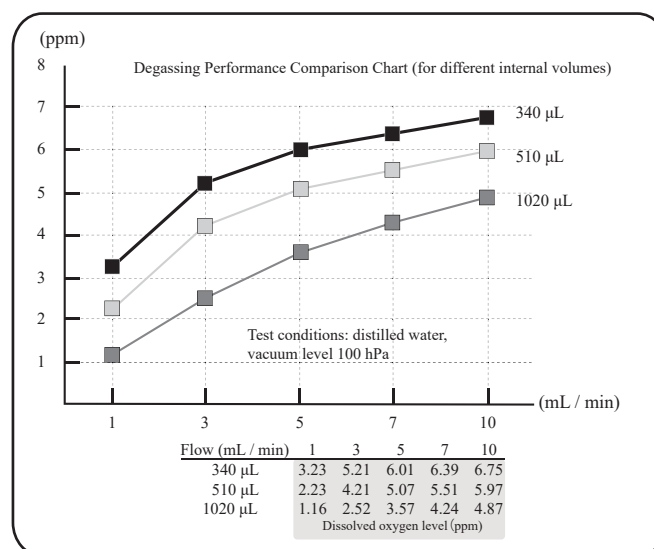

Note that degassing performance varies greatly depending on operating conditions.

NEW

Solvent Degassing System Gastorr BG Series

A trouble-less degassing series equipped with larger internal volume and real time display

Features

- ☐ Pick the model with the right internal volume for your application
- ☐ Auto cleaning function prevents vacuum pump deterioration
- ☐ CPU control achieves stable degassing
- ☐ Independent chamber design prevents solvent contamination
- ☐ Choose from 2 channel or 4 channel configurations
- ☐ Real time display of vacuum level



Gastorr BG-42

Gastorr BG-44

Product Name	Gastorr Solvent Degassing Units			
Product Number	BG-42-02	BG-44-02	BG-42-10	BG-44-10
Channels	2	4	2	4
Internal volume	510μL		1020 μL	
Flow rate	≤ 10 mL/min			
Vacuum range	100 hPa fixed			
Thread size	1/4-28 UNF			
Wetted material	Teflon™ AF*1, ETFE, PTFE			
Remote control	Input: — Output: Error signal			
Dimensions	108 (H) ×70 (W) × 240 (D) mm, excluding protuberances			
Weight	Approx. 2.1 kg			
Power	AC 100 - 240 V (50 / 60 Hz) MAX 80 VA			
Order code	SGA-G3003	SGA-G3004	SGA-G3005	SGA-G3006

*1: Teflon TM AF is a registered trademark of the Chemours Corporation.
Note: cannot be used with fluorinated solvents.